


Product Information



For more information
Phone
0117 958 2450
Or visit
www.ksltd.com

SUPERSEAL

Brushstrip in carrier 180° standard range

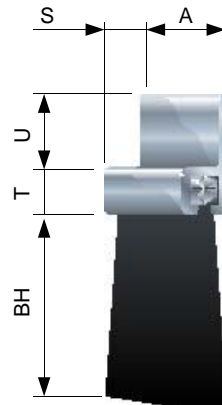

Superseal is manufactured in hardwearing nylon filament fitted with a durable mill finish aluminium carrier.

Features
• Eight nominal section sizes
• 2m, 2.5m and 3m standard lengths
• Brush heights up to 213mm
• Modified lengths, brush heights and finishes available on request

Light duty

Type	Carrier dimensions			Brush height BH	Fill material	Part number		
	S	T	U			2m length	2.5m length	3m length
M	3.70	4.00	9.50	10.00	Nylon black 0.10	H610MF2013	H610MF2513	H610MF3013
				15.00	Nylon black 0.15	H610MF2018	H610MF2518	H610MF3018
A	5.20	5.60	11.10	10.00	Nylon black 0.15	H610AF2014	H610AF2514	H610AF3014
				15.00	Nylon black 0.15	H610AF2019	H610AF2519	H610AF3019
B	6.50	6.70	10.80	13.50	Nylon black 0.15	H610BF2019	H610BF2519	H610BF3019
				19.00	Nylon black 0.15	H610BF2025	H610BF2525	H610BF3025
				26.00	Nylon black 0.15	H610BF2032	H610BF2532	H610BF3032
				38.00	Nylon black 0.15	H610BF2044	H610BF2544	H610BF3044

Medium duty

Type	Carrier dimensions			Brush height BH	Fill material	Part number		
	S	T	U			2m length	2.5m length	3m length
C	7.70	8.40	10.60	15.00	Nylon black 0.15	H610CF2022	H610CF2522	H610CF3022
				25.00	Nylon black 0.15	H610CF2032	H610CF2532	H610CF3032
				35.00	Nylon black 0.20	H610CF2042	H610CF2542	H610CF3042
				50.00	Nylon black 0.20	H610CF2057	H610CF2557	H610CF3057
D	10.00	10.80	17.30	12.00	Nylon black 0.20	H610DF2019	H610DF2519	H610DF3019
				19.00	Nylon black 0.20	H610DF2025	H610DF2525	H610DF3025
				26.00	Nylon black 0.20	H610DF2032	H610DF2532	H610DF3032
				30.00	Nylon black 0.20	H610DF2038	H610DF2538	H610DF3038
				40.00	Nylon black 0.20	H610DF2048	H610DF2548	H610DF3048
				49.00	Nylon black 0.20	H610DF2057	H610DF2557	H610DF3057
E	10.50	11.80	18.20	75.00	Nylon black 0.30	H610DF2083	H610DF2583	H610DF3083
				41.00	Nylon black 0.30	H610EF2051	H610EF2551	H610EF3051
				50.00	Nylon black 0.30	H610EF2060	H610EF2560	H610EF3060
				66.00	Nylon black 0.30	H610EF2076	H610EF2576	H610EF3076
				75.00	Nylon black 0.30	H610EF2085	H610EF2585	H610EF3085
				100.00	Nylon black 0.40	H610EF2110	H610EF2510	H610EF3110

Kleeneze Sealtech Limited
Ansteys Road, Hanham
Bristol BS15 3SS
Tel +44 (0)117 958 2450
Fax: +44 (0)117 960 0141
Email: sales@ksl.uk.com
Web: www.ksltd.com

Product Information



For more information
Phone
0117 958 2450
Or visit
www.ksltd.com

SUPERSEAL

Brushstrip in carrier 180° standard range

Heavy duty

Type	Carrier dimensions			Brush height BH	Fill material	Part number		
	S	T	U			2m length	2.5m length	3m length
G	13.50	14.50	19.50	45.00	Nylon black 0.50	H610GF2057	H610GF2557	H610GF3057
				64.00	Nylon black 0.30	H610GF2076	H610GF2576	H610GF3076
				102.00	Nylon black 0.50	H610GF2114	H610GF2514	H610GF3114
				150.00	Nylon black 0.50	H610GF2162	H610GF2562	H610GF3162
H	17.90	18.10	50.00	213.00	Nylon black 0.90	H610HF2229	H610HF2529	H610HF3229

All dimension are in mm

How to specify

Select required brush height (BH) and thickness according to the size of gap to be sealed.

For modified products, select the standard part number and specify:

- ▶ Modified length (A)
- ▶ Brush height (BH)

Technical notes


Cutting to length

Superseal should be removed from the aluminium carrier and cut to length with side action croppers to ensure the ends are completely resealed and avoid spillage of the filaments.

Aluminium carriers should be cut with a fine tooth saw and deburred. File a lead-in at one end of the carrier to aid assembly of the brushstrip.

Fitting

Superseal products should be fitted with the tips of the filaments in firm contact with the mating surface but barely flexed. Fixings should be positioned within 50mm of each end and at 300mm centres thereafter.

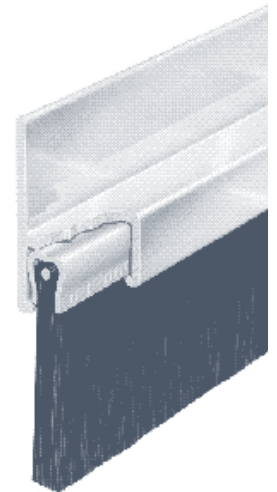

Superseal brushstrip is also available in a range of aluminum carriers

Kleeneze Sealtech Limited

Ansteys Road, Hanham
Bristol BS15 3SS

Tel +44 (0)117 958 2450

Fax: +44 (0)117 960 0141

Email: sales@ksl.uk.com

Web: www.ksltd.com

Buy online



- ▶ Stock items normally despatched next day
Modified items within 5 days.