


# SUPERSEAL

## Brushstrip in carrier 45° standard range

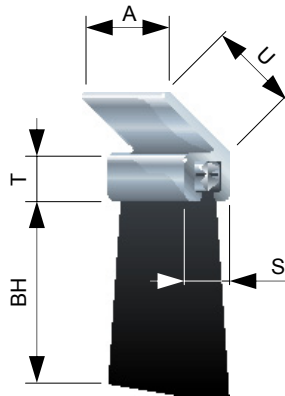

Superseal is manufactured in hardwearing nylon filament fitted with a durable mill finish aluminium carrier.

### Features

- Eight nominal section sizes
- 2m, 2.5m and 3m standard lengths
- Brush heights up to 213mm
- Modified lengths, brush heights and finishes available on request

### Light duty

Type	Carrier dimensions			Brush height BH	Fill material	Part number		
	S	T	U			2m length	2.5m length	3m length
A	5.20	5.60	12.0	10.00	Nylon black 0.15	H610AR2014	H610AR2514	H610AR3014
				15.00	Nylon black 0.15	H610AR2019	H610AR2519	H610AR3019
B	6.50	6.70	16.00	13.50	Nylon black 0.15	H610BR2019	H610BR2519	H610BR3019
				19.00	Nylon black 0.15	H610BR2025	H610BR2525	H610BR3025
				26.00	Nylon black 0.15	H610BR2032	H610BR2532	H610BR3032
				38.00	Nylon black 0.15	H610BR2044	H610BR2544	H610BR3044

### Medium duty

Type	Carrier dimensions			Brush height BH	Fill material	Part number		
	S	T	U			2m length	2.5m length	3m length
C	7.70	8.40	17.00	15.00	Nylon black 0.15	H610CR2022	H610CR2522	H610CR3022
				25.00	Nylon black 0.15	H610CR2032	H610CR2532	H610CR3032
				35.00	Nylon black 0.20	H610CR2042	H610CR2542	H610CR3042
				50.00	Nylon black 0.20	H610CR2057	H610CR2557	H610CR3057
D	10.00	10.80	24.00	12.00	Nylon black 0.20	H610DR2019	H610DR2519	H610DR3019
				19.00	Nylon black 0.20	H610DR2025	H610DR2525	H610DR3025
				26.00	Nylon black 0.20	H610DR2032	H610DR2532	H610DR3032
				30.00	Nylon black 0.20	H610DR2038	H610DR2538	H610DR3038
				40.00	Nylon black 0.20	H610DR2048	H610DR2548	H610DR3048
				49.00	Nylon black 0.20	H610DR2057	H610DR2557	H610DR3057
E	10.50	11.80	26.00	41.00	Nylon black 0.30	H610ER2051	H610ER2551	H610ER3051
				50.00	Nylon black 0.30	H610ER2060	H610ER2560	H610ER3060
				66.00	Nylon black 0.30	H610ER2076	H610ER2576	H610ER3076
				75.00	Nylon black 0.30	H610ER2085	H610ER2585	H610ER3085
				100.00	Nylon black 0.40	H610ER2110	H610ER2510	H610ER3110



Kleeneze Sealtech Limited  
Ansteys Road  
Hanham  
Bristol  
BS15 3SS  
UK

T: +44 (0)117 958 2450  
F: +44 (0)117 960 0141  
E: sales@ksltd.uk.com  
www.ksltd.com

# SUPERSEAL

## Brushstrip in carrier 45° standard range

### Heavy duty

Type	Carrier dimensions			Brush height BH	Fill material	Part number		
	S	T	U			2m length	2.5m length	3m length
G	13.50	14.50	29.00	45.00	Nylon black 0.50	H610GR2057	H610GR2557	H610GR3057
				64.00	Nylon black 0.30	H610GR2076	H610GR2576	H610GR3076
				102.00	Nylon black 0.50	H610GR2114	H610GR2514	H610GR3114
				150.00	Nylon black 0.50	H610GR2162	H610GR2562	H610GR3162
H	17.90	18.10	50.00	213.00	Nylon black 0.90	H610HR2229	H610HR2529	H610HR3229

All dimensions are in mm

#### How to specify

Select required brush height (BH) and thickness according to the size of gap to be sealed.

For modified products, select the standard part number and specify:

- ▶ Modified length (A)
- ▶ Brush height (BH)

#### Technical notes


##### Cutting to length

Superseal should be removed from the aluminium carrier and cut to length with side action croppers to ensure the ends are completely resealed and avoid spillage of the filaments.

Aluminium carriers should be cut with a fine tooth saw and deburred. File a lead-in at one end of the carrier to aid assembly of the brushstrip.

##### Fitting

Superseal products should be fitted with the tips of the filaments in firm contact with the mating surface but barely flexed. Fixings should be positioned within 50mm of each end and at 300mm centres thereafter.

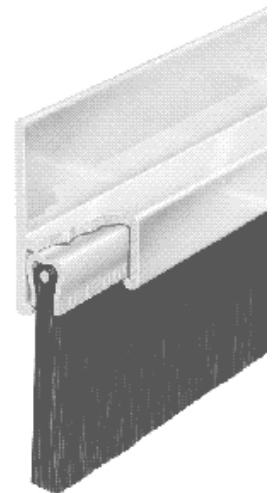

Superseal brushstrip is also available in a range of aluminum carriers



Kleeneze Sealtech Limited  
 Ansteys Road  
 Hanham  
 Bristol  
 BS15 3SS  
 UK

T: +44 (0)117 958 2450  
 F: +44 (0)117 960 0141  
 E: sales@ksltd.uk.com  
 www.ksltd.com

Buy online



- ▶ Stock items normally despatched next day  
 Modified items within 5 days.